

Mendip Stoves are created and constructed with thought and care. Design and quality are key in all our stoves. Each stove is tested for ease of use and durability, our designers have maintained each stove's own individual style to complement your fireplace or hearth. This combination of form and function make Mendip stoves a great choice. Each stove is named after a place in the beautiful Mendip hills in Somerset in which we are based.



#### Multi Fuel Versatility

Mendip stoves are built with the express ideals of being fully multi-fuel capable, this means that the combustion chamber and indeed all parts of the stove have been designed so that they can effectively burn wood and smokeless fuels. Mendip stoves have cast iron grates and heavy duty vermiculite linings to improve combustion, Mendip stoves now feature newly designed cast iron grates and each stove is carefully designed and tested. Attention to the manufacturing detail means that we are able to offer a 5 YEAR warranty against manufacturing defect on all Mendip stoves.

#### Burning Wood in a Smoke Control Area

Mendip stoves are tested for use as a wood burning stove in a smoke controlled area. Please check the symbol on each page to see if your specific choice is suitable for burning wood in a smoke control area.

#### Build Quality and Certification

Mendip Stoves are manufactured by an established company with a history of stove production, assuring you that your stove was beautifully built by experienced craftsman using today's most cutting edge technology. Mendip stoves are manufactured to exceed British standards with demand for quality at every stage from its heavy duty steel body to the ergonomically designed door handle, every detail has been meticulously considered.

The simple to operate air supplies have been carefully considered so as not only to ensure the most efficient combustion possible but also to pass a continuous stream of air over the front glass helping to keep your view of the fire unimpeded. All Mendip stoves are CE Marked. This means that your stove has been independently tested to exacting European standards for heating efficiency, safety and emissions.

## PRODUCT INFORMATION

For an overview at a glance here are some symbols which give information about Mendip Stoves.



burn.

Designed to burn

The icons denote which fuel each


stove is designed and tested to





Gas Stove

Natural Gas and LPG appliance.



## Closed Combustion

This stove is capable of burning with external air via a connection pipe.



#### 3 flow air system

The Mendip stoves range has a 3 flow air system to provide an optimal level of combustion air where it is needed for the combustion process. This results in an especially clean and efficient combustion.



#### 12mm Floor Plate Compatible

This stove is capable of being installed on a 12mm glass plate.



#### Construction

Model is manufactured from steel with a fully welded construction.



#### Cast Iron Door

Model fitted with Cast iron door.





#### Convection stove

Mendip stoves are fitted with a convection top or full convection to give better heat distribution.



**LENGTH** 

#### Log size

Mendip Stoves are designed for common lengths of logs 30cm to 60cm.



#### Air wash system

Model is fitted with an air wash system for cleaner glass.



#### New Low VOC Water Base Paint



#### Eco Design

SIA Ecodesign Ready stoves are designed to reduce PM emissions by burning wood more efficiently and completely.



## Suitable for burning wood in a Smoke control area

Mendip stoves carrying the tick logo are approved for burning wood in a smoke control area. Special note should be taken to the manufacturers instructions on burning the stove in a smoke control area.

## Design and Product innovation

Design and product innovation are essential ingredients in the development of a Mendip stove, our design of new parts is inspired by years of experience in the development of Wood and Coal stoves. We think through the product and look at ways to make it operate more effectively, for longer and burn more cleanly. This focus on our products is on-going as we strive to provide better products through design. From the first idea at drawing board stage to putting the finishing touches to the completed stove, we pride ourselves in the outstanding design of Mendip Stoves, with every stove being crafted with care. This accompanied with our aim to create a stove which can bring a touch of elegance to any room means we are constantly on the search for new technology to help us do this.

Our range has evolved over the years, but retained the timeless look which attracts many people to Mendip Stoves, and gained us the reputation of combining superior combustion techniques and efficiency with great aesthetics. Our stoves are as beautiful outside as the light they radiate from inside.

#### Award Winning Design

When designing a stove we consider many factors in the development process, much time, care and thought go into our designs to make them perform and look as good as is possible, so it is very gratifying to have been nominated for and won 'The best under 5kW multi-fuel stove of 2016' at the Hearth and Home Awards for our new stove 'The Woodland'. We are suitably proud.



#### Distinctive Products

In designing our stoves we are keen to give them a distinctive edge. We choose quality materials such as quality cast iron, steel and stainless steel to design individual stoves that have character and that work well.

Mendip stoves have developed the Ashcott stove which combines the use of steel and cast iron to produce an innovative stove.



#### Quality Components

All component parts are quality sourced from UK and European manufacturers. New we have introduced cast iron doors on the Loxton range and the Mendip 5 and 8 stoves. These doors give the stoves a more rustic robust feel and with cleaner lines from the moulding process the stove has increased stability. The Loxton also now features the Mendip Stoves logo.

New bespoke fitted grates have been created from solid cast iron for Churchill, Loxton, Sqabox, Woodland and Somerton models.



#### Closed Combustion - Air Box

Mendip Stoves have developed a new air controller which through one simple single lever seamlessly controls primary, secondary and tertiary air for the appliance. This development is not only simpler to control, but is also cool to touch when the fire is operational.

Each stove has the potential to connect to external air, so your fire only draws the combustion air it needs from outside, this makes your stove more efficient and cleaner. (Loxton, Maxi, Churchill, Sqabox, Woodland & Somerton).



# Mendip (Stoves

Camping on the farm...

## **ON TOUR**





we live and work in one of the most beautiful areas of the UK.









e with us on our little stove tour and perhaps when you are next in the west country pay us a visit.



## Mendip Stoves and The Woodland Trust





The Woodland Trust plants, protects, and restores native woodlands. We look after more than 1,000 woods across the UK, all of which are free and open to the public.

The UK is one of the least wooded countries in Europe with just four per cent native tree cover. Only half of this is ancient woodland which is hundreds of years old and can never be replaced.

Our native woods are vital habitats for much loved species like the dormouse, red squirrel and song thrush. They are beautiful places for people of all ages to relax and play. Trees purify the air we breathe and provide shelter against the harsher elements. We need them, and they need our help.

Since we were formed 40 years ago, we have planted more than 23 million native trees. We have helped save more than 400 threatened ancient woods in the past ten years alone, and are undertaking a vast restoration project to bring 9,600 hectares of damaged ancient woodland back to life.

The Woodland Trust is delighted to welcome Mendip Stoves as a partner. Mendip Stoves support will help us achieve our vision of a richly wooded UK landscape and a public that respects woodland and shares our love of trees.

Mendip Stoves will help protect our precious and fragile woodlands by promoting the use of sustainable woodland fuel helping us plant more trees - and create lasting woodland for the benefit and enjoyment of generations.





# Help the Woodland Trust to plant more trees

Thousands of people and organisations have planted woods with the Trust's help over the last 40 years, could you too?

## Create your own wood with MOREwoods

MOREwoods is a UK-wide scheme providing practical and some financial support for the creation of woodland. Since starting the scheme in 2008, we've helped thousands of people and communities plant over 1,100 hectares of woodland.

If you would like to see how trees can enhance your land – whether to help wildlife flourish, create a secure and cheap supply of future firewood for your Mendip stove, or simply because of your love for trees, visit our website www. woodlandtrust.org.uk to find out more.

### How Mendip Stoves helps

For every Mendip stove bought Mendip Stoves contribute £10 to the Woodland Trust. Our contributions will help to plant new native trees and protect Britain's ancient woodlands.

www.woodlandtrust.org.uk











'Best Stove 2016' Under 5 kW category Hearth & Home Awards 2016

## The Woodland Range

The Woodland stove range comprises of two models, The Woodland and Woodland Large. They form the corner stone of our support for The Woodland Trust. Woodland stoves are designed for burning wood efficiently, they are easy to use with the three-way air control system, allowing for optimum combustion while the efficient air wash system keeps the glass cleaner.

The New Eco-design ready chamber uses tertiary air to aid post combustion; so ultimately, your stove will burn more cleanly creating as much heat energy from your fuel as possible. Woodland stoves have good size fire boxes which will accept

a standard 300mm cut log. The Woodland has a lovely wide viewing glass to make the fire come alive in your home, these stoves have great presence! Built with a quality steel body and cast iron door, there is now a size of Woodland stove to suit your requirement. Woodland stoves have low distance to combustible materials which will help the stove fit nicely into both timber frame and traditional constructed houses.

We are positive this stove will warm your heart too; knowing you've contributed to renewal of UK trees and woodlands brings the happiest of situations to purchasing this beautiful stove.

| Features  | Dimensions<br>HxWxD  | kW Output<br>Range  | Efficiency | Class Key  |
|---|--|---------------------|------------|--|
| Cast iron door Milled stainless steel handle Cast iron grate Closed combustion Single air control | Woodland & Convector plus 615 x 570 x 340 775 x 570 x 340 Woodland Large 670 x 570 x 420 870 x 570 x 420 | 4 to 7 kW 7 to 9 kW | 81%<br>79% | 40cm Log Length Foor Plate Compatible Compatible Cast ion Door |



Woodland



Woodland Large



Woodland Convector Plus Logstore



Woodland Large Logstore











## THE ASHCOTT RANGE

The Ashcott and Ashcott wide stoves have a deeply contoured cast iron door, slim convection top plate and sculptured cast iron legs. The door has a magnetic mechanism for easier closing. The stoves compact design is a perfect blend of classic and contemporary styling. The fire is captured through the large ceramic glass window and the stove is finished with milled stainless-steel handle and air control knob.

The New Ashcott Wide has a broader stance but is narrower than the standard Ashcott, the wide model is fitted with a

catalyst to minimise emissions. Ashcott's have slick moulded vermiculite lining which ensure efficient combustion. Each model is available with a pedestal (Ashcott only) and or Logstore options. Both Eco design ready models provide 4.7kW of heat and have a direct external air connection as standard.

Eco-design is a European wide programme to lower emissions, which comes into force in the UK in 2022. Setting the standard for environmentally friendly stoves.

| Features   | Dimensions                                 | kW Output Range                         | Efficiency     | Class Key   |
|--|--|---|----------------|---|
| Cast iron door                                     | H x W x D<br>Ashcott                       | Wood                                    | Wood           | STEEL STEEL   |
| Milled stainless steel handle<br>Closed combustion | STD 575 x 424 x 370<br>LOG 800 x 424 x 370 | 4 to 7 kW<br>4 to 7 kW                  | 80.3%<br>80.3% | 30cm  |
| Single air control Magnetic door sealing           | PED 750 x 424 x 370                        | 4 to 7 kW                               | 80.3%          | → W/ LENGTH   |
| Magnetic door scanng                               | Ashcott Wide                               | 4 . 7 . 7 . 7 . 7 . 7 . 7 . 7 . 7 . 7 . | 750/           | WOODBURNING V                                       |
|  | STD 597 x 619 x 304<br>LOG 850 x 619 x 304 | 4 to 7 kW<br>4 to 7 kW                  | 75%<br>75%     | 12mm<br>Floor Plate<br>Compatible Cast Iron<br>Door |



Ashcott & Ivory



Ashcott Pedestal



Ashcott Logstore



Ashcott Wide



Ashcott Wide Logstore









## ASHCOTT GAS

Stylishly styled to fit equally well in either contemporary or traditional settings alike, the Ashcott Gas stove has a cast iron door and top plate. For increased presence, logstore models are mounted on a matching raised log store base that can be used to house chopped logs to add to the woodburning aesthetic. Creating breath-taking flame visuals, Ashcott Gas stoves feature a highly realistic log bed.

Designed with the very latest twin burner gas fire technology, these sophisticated and economical fanned convection stoves provide ample controllable heat from 1.5kW up to 6.5kW. For greater convenience, these stylish stoves have a Programmable Thermostatic handset which allows you to preset the stove to provide heat at selected times or temperatures. Natural Gas and LPG models available.

| F'O 3. | †11 | 120                     | 20 |
|--------|-----|-------------------------|----|
| T Ca   | ш   | $\Gamma \Gamma \subset$ | 20 |

Programmable Handset Dual Burner Convection Fan Cast Iron Door Closed Combustion

#### Dimensions HxWxD

STD 580 x 424 x 370 LOG 800 x 424 x 370

## kW Output Range

1.5 to 6.5 kW

## Efficiency GAS

83%

#### Class Key















Ashcott Gas



Ashcott GAS Logstore











## The Christon Freestanding Range

The Christon 550 and 750 are a modern modular stove design; each stove features a large glossy glass front which emphasises the wood fire within. The Christon stove range is a full convector and it is ideal for a modern environment. Christon 550 and 750 have their own specifically designed logstore and side bench options.

The glass door has a multipoint locking point mechanism for secure closing. The Christons' combine cutting edge combustion technology with advanced firebox designed to burn wood so cleanly that emissions are lowered to minimal levels ensuring compliance with future Ecodesign emission standards.

#### Features

Glass fronted door Multi-point door locking Closed Combustion Singular air control Full convector model

## Dimensions H x W x D

Freestanding 550 x 550 x 360 550 x 750 x 360

Logstore 800 x 550 x 360 800 x 750 x 360

## kW Output Range

4 to 7 kW 6 to 9 kW

#### Efficiency Wood

78.4% 77.8%

#### Class Key



















Christon 550



Christon 750









## THE LOXTON RANGE

The clean lines of the Loxton cast iron door and large glass window open the fire box to the room. The easy to operate single air control make adjustment simple and the latest three-flow clean burn air system allows for a more complete combustion. The Loxton is available in a large range of outputs from 3.2 to 10kW, so you can easily match the output to your room. The Loxton has been built with efficiency in mind, its construction incorporates many of the latest combustion

techniques to ensure that your stove burns wood and registered smokeless fuels efficiently and cleanly. Its pre-heated secondary air wash not only washes over the glass to help keep it clean and free of deposits but also feeds air directly into the heart of the fire. Its tertiary air aids post combustion of flue gases so your stove burns cleanly and uses as much energy from your fuel as possible.

| Features   | Dimensions   | kW Output Range                                   | Efficiency                     | Class Key   |
|--|--|---|--------------------------------|---|
| Cast iron door Cast iron grates Closed combustion Single air control Milled stainless steel handle | 525 x 380 x 320<br>606 x 510 x 320<br>665 x 510 x 410<br>665 x 710 x 410 | 3 to 6 kW<br>4 to 9 kW<br>6 to 9 kW<br>7 to 11 kW | 81.3%<br>81%<br>79.3%<br>80.9% | STEEL 30cm 30cm 60cm 12m 12m 1cm 1cm 1cm 1cm 1cm 1cm 1cm 1cm 1cm 1c |



Loxton 3



Loxton 5



Loxton 8



Loxton 10





## LOXTON LOGSTORES

The Loxton logstore model has a robust cast iron door, the logstore adds height and physical presence to the stove and makes it ideal for a freestanding position. The logstore version mirrors the freestanding Loxton model ranges in terms of contemporary design, styling and build quality, but also offers ideal log storage. The Loxton has been built with efficiency in mind; its construction incorporates many of the latest

techniques to ensure that your stove burns wood and smokeless fuels efficiently and cleanly. Its pre-heated secondary air wash not only washes over the glass to help keep it clean and free of deposits but also feeds air directly into the heart of the fire. With these features, the Loxton logstore is a stunning stove ideal as a centre piece stove or placed simply in a large fireplace. Logstore models are available in three models from 5kW to 10kW.

| Features              | Dimensions      | kW Output Range | Efficiency | Class Key                                |
|-----------------------|-----------------|-----------------|------------|--|
|                       | H x W x D       |                 |            |  |
| Cast iron door        | 760 x 510 x 320 | 4 to 7 kW       | 81%        | STEEL 30cm                               |
| Cast iron grates      | 865 x 510 x 410 | 6 to 9 kW       | 79.3%      | Consistent to Plate    October 100   Too |
| Closed combustion     | 865 x 710 x 410 | 7 to 11 kW      | 80.9%      | LOG LENGTH Compatible                    |
| Single air control    |                 |                 |            |  |
| Open log store        |                 |                 |            | MULTI FUEL Cast Iron Door                |
| Polished steel handle |                 |                 |            |  |
|                       |                 |                 |            | SiA                                      |
|                       |                 |                 |            | ready                                    |



Loxton 5 Logstore



Loxton 8 Logstore



Loxton 10 Logstore





CHURCHILL 5



## THE CHURCHILL RANGE

The Churchill exudes contemporary style, the stove has a softly curving glass door and easy open chromium handle which adds sophistication to the Churchill stove. The Churchill radiant model range is available in a choice of outputs, from 5 to 10 kW, so you can be sure that you will be getting the correctly sized stove that looks stylish and has the latest technology incorporated for your room. Control of your stove is easy with the unique Universal air controlling system from Mendip,

combustion air is adjusted with a single cool touch lever which precisely directs combustion air and enables better efficiency and more complete combustion of the wood fuel.

Churchill models are designed with an external air connection which allows combustion air to come from outside and not from the room. Another example of clever thinking from Mendip.

| Features  | Dimensions   | kW Output Range                      | Efficiency            | Class Key   |
|---|--|--------------------------------------|-----------------------|---|
| Curved door Cast iron grates Air cooled handle Closed combustion Single air control | H x W x D<br>606 x 510 x 380<br>665 x 510 x 460<br>665 x 710 x 480 | 4 to 7 kW<br>6 to 9 kW<br>7 to 11 kW | 81%<br>79.3%<br>80.9% | STEEL  40cm 70 60cm LOG LENGTH  12mm Ploor Plate Compatible |



Churchill 5



Churchill 8



Churchill 10









## Churchill Convection Range

Churchill convection stoves have gently curved side panels to give a distinctively different look. Convection stove panels provide improved heat distribution by transferring heat to the room more effectively and efficiently than a radiant counterpart. The distance to combustible materials is lower than in a standard radiant stove, and therefore are more suited to timber framed buildings and open plan areas.

The Churchill Convection Logstore is a stylish tall contemporary stove range with outputs from 5kW to 10kW. These efficient stoves utilise the very latest combustion technology with an

effective air wash and tertiary ports to aid secondary combustion. The raised fire chamber enables easy reloading of your stove and an excellent view of the fire from your living room chair. The store area below the fire box is suitable for storing your days' fuel thus giving added convenience to the daily task of restocking wood. The simple but sophisticated single air control system is designed to seamlessly mix primary, secondary and tertiary air to give the best possible combustion. Churchill models are design with an external air connection allowing combustion air to come from outside.

| Features  | Dimensions   | kW Output Range                      | Efficiency            | Class Key                      |
|---|--|--------------------------------------|-----------------------|--------------------------------|
| Curved door<br>Cast iron grates<br>Air cooled handle  | 606 x 575 x 380 convection<br>665 x 583 x 473 convection<br>665 x 759 x 480 convection   | 4 to 7 kW<br>6 to 9 kW<br>7 to 11 kW | 81%<br>79.3%<br>80.9% | STEEL 40cm TO 60cm LONG LENGTH |
| Closed combustion Single air control Convection Stove | 800 x 575 x 380 convection<br>1011 x 583 x 473 convection<br>1052 x 759 x 480 convection | 4 to 7 kW<br>6 to 9 kW<br>7 to 11 kW | 81%<br>79.3%<br>80.9% | NUCLIFICE    V                 |
|   |  |                                      |                       |                                |



Churchill 5 Convection



Churchill 8 Convection



Churchill 10 Convection



Churchill 5



Churchill 8 Convection Logstore Convection Logstore



Churchill 10 Convection Logstore





Woodland Double Sided Catalyst











# Double Sided Range

Mendip Stoves double sided stove range incorporates 3 models, The Woodland, The Loxton 8 and sophisticated Churchill 8. These stoves, which are a fantastic feature for any room and are available in our standard and logstore models. The added height of the logstore models enables easier reloading as well providing useful storage area below the stove chamber. All models have two opening doors so reloading can occur from either side of the stove. Double sided stoves are ideal for an open plan rooms, or to heat two smaller rooms from one appliance. The Loxton and Woodland models have cast iron doors whereas

the Churchill has contemporary curved doors and glass which adds to its modern aesthetic look. The Woodland double sided woodburning stove is fitted with a high tech catalyst keeping the stove burning cleanly and efficiently. All three models have a cast iron grates and impressive combustion technology, as well as the single air control lever for optimal operation. All models come as standard as closed combustion capable as well as an airwash system which runs on both doors, making sure their captivating fire view can be enjoyed by everyone.

### Features

Cast iron grate Closed combustion Single air controller

Loxton: Cast iron door and handle Churchill: Steel door, Chromed air cooled handle Woodland: Cast iron door,

Stainless milled handle

Dimensions H x W x D

Loxton 8 DS 660 x 510 x 520 8 DS LS 965 x 510 x 520

Churchill 8 DS 660 x 510 x 650 8 DS LS 965 x 510 x 650

Woodland DS 620 x 570 x 430 DS LS 820 x 570 x 430 kW Output Range

6 to 10 kW

Loxton & Churchill 77.3%

Woodland 76%

Efficiency

### Class Key















### Models



Woodland DS CAT



Loxton 8 DS



Churchill 8 DS



Woodland DS CAT Logstore



Loxton 8 DS Logstore



Churchill 8 DS Logstore

37

\* Only Woodland Model is SIA Eco -Design





# Somerton II Side Glass

The thoughtfully designed Somerton II side glass stove has a host of visual features that enhance your enjoyment of burning wood. The tall, rounded airwashed glass and large full length polished side glass panels enable you to enjoy the flames from a wider angle. The quality finish of this anthracite painted stove is completed with stainless steel polished log door trim, and an elegantly formed one-piece stainless steel handle.

The Somerton II has design and quality at its core. The air control lever and door operation handle have been designed to be cool to touch when in use. Somerton stoves feature the innovative universal air control system, which, with movement of a single lever allows control of all three air supplies into the modern insulated combustion chamber. Internally, the chamber has bespoke cast iron grates and a large ash pan which allow for extended emptying intervals.

| $\neg$ | ۰ .         | 1- |    |        | _ |
|--------|-------------|----|----|--------|---|
| -      | $\triangle$ | Т1 | 17 | $^{-}$ | C |
|        |             |    |    |        |   |

Convection stove
Full glass side panels
Multi-point door closure
Stainless single formed handle
Cool touch handle
Cast iron grate

### Dimensions H x W x D

1100 x 495 x 460

# kW Output Range

5 to 8 kW

### Efficiency Wood

75.3%

### Class Key

















Right View



Somerton II



Left view









Christon 400



# Christon Inset 400

The Christon 400 is a compact inset stove, the smallest in Christon range, it has been especially designed to fit in a standard British fireplace with the fireback removed. This compact stove well thought though and is not small on features, it has high efficiency chamber and external air capability which make it perfect for both new build and refurbishment applications.


To finish the look the Christon 400 is available with either a 4 sided or 3 sided frame to suit the installation. Installation can be achieved with the minimum of disruption to your home.


The Christon has a cast iron riddling grate system, stainless steel milled handle and stainless control handles to complete the modern look.

| Features  | Dimensions  | kW Output Range | Efficiency | Class Key                                      |
|---|---|-----------------|------------|--|
| Quality steel construction<br>Large glass area<br>Convector box<br>3 or 4 sided frames<br>Fit fireplace<br>22" (560mm) h x<br>16" (405mm) w | Front H x W 4-sided 626 x 4 3 sided 590 x 4  Box H x W x 554 x 39 | 2               | 76%        | STEEL 30cm LOG LENGTH  MULTIPLE  MULTIPLE  SIA |



Christon 400









# Christon Inset 550

Inset stoves give a different vision for a wood stove, a flush built in product ideal for the more minimalist rooms. Christon wood inset fires have simple classic lines with a large window allowing the fire to show through. The well-constructed box within a box design allows good convection air flow around the firebox and into the room. The large ceramic glass window emits ample radiant heat.

The Christon inset range is manufactured in steel plate; it has a fully insulated chamber and is designed to burn wood efficiently. This stove fits comfortably in most environments providing ample heat. The clean smooth looks of the front of a Christon stove are complimented by a choice of a 3 or 4 sided frames allowing the stove to be fitted on a hearth or set higher in a flush wall application.

| -    | 1           | 1. |    |               | _ |
|------|-------------|----|----|---------------|---|
| - 1- | $\triangle$ | т1 | 11 | $r \triangle$ | C |
|      |             |    | 1. |               |   |

Glass fronted door Multi-point door locking Closed Combustion Singular air control Full convector model

### Dimensions HxWxD

550 x 550 x 360

# kW Output Range

Wood

4 to 7 kW

## Efficiency Wood

77.8%

### Class Key





















Christon Inset 550



















# Christon Inset 750

The Christon 750 offers you a panoramic sensation; the view of the fire through a wide glass is breath-taking. An inset fireplace provides a romantic, welcoming atmosphere and creates unforgettable moments for you and your family.

The large insulated chamber will accommodate a log up to 60cm long and the steel constructed box within a box design

provides good airflow around the fire box allowing convection heat to be distributed effectively to the room. If you are looking for a different vision and innovative design, this is the right choice for you. The clean smooth looks of the front of a Christon stove are complimented by the choice of a 3 or 4 sided frame which allows the stove to be fitted on a hearth or set up high in a flush wall application.

| reatures      |     |
|---------------|-----|
|               |     |
| Class fronted | doc |

Glass fronted door Multi-point door locking Closed Combustion Singular air control Full convector model

### Dimensions H x W x D

550 x 750 x 360

# kW Output Range

6 to 9 kW

# Efficiency Wood

78.4%

### Class Key























Christon Inset 750







# Burcott

The Burcott is an efficient multi-fuel inset stove designed to fit into a standard fireback. This stove can replace your inefficient open fire with an efficient clean and modern looking stove with the minimum of installation disruption. The Burcott has a

convection chamber around the stove providing a constant flow of hot air into your room. Convection stoves warm areas quicker than radiant models and offer a more efficient way to distribute the stoves' heat.

| Features                      | Dimensions     | kW Output Range | Efficiency | Class Key   |
|-------------------------------|----------------|-----------------|------------|---|
|                               | H x W x D      | Wood            | Wood       |   |
| Burcott                       | Burcott        |                 |            | STEEL ZJZ   |
| Convector box                 | 600 x 477 x 75 | 3 to 5 kW       | 80%        | → )/\ \ \ \frac{\frac{1}{1}}{1} \frac{1}{1} \ \ \frac{1}{1} \ \ \frac{1}{1} \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ |
| Cast iron door                |                |                 |            | LOG LENGTH  |
| Milled stainless steel handle |                |                 |            |   |
|                               |                |                 |            | MULTI FUEL Cast Iron  |




# Eco Rating

Ecodesign is the European-wide programme to lower emissions. It is due to come into force in 2022. Mendip stoves have created new stoves that will meet the lower emission limits set out in the new standard now, so you can be comfortable that your new stove is one of the cleanest burning in the market today.





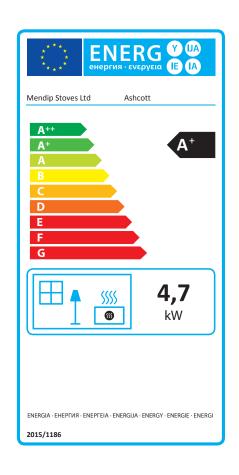

# Burcott Christon Inset 400 Christon Inset 550 Christon Inset 750

# Accessories

We have carefully chosen a range of accessories to complement our stoves. Each chosen for their practicality and good looks.



Oxmoor 2 H: 43cm



Lympsham
H: 77cm



Oxmoor 3 H: 43cm



Thorney 2
H: 62cm



Oxmoor 4 H: 43cm



Westhay l H: 42cm



Westhay 2 H: 30cm

Thorney l H: 58cm



Westhay 3 H: 42cm



Chunky Weave
H: 47cm x 43cm



Kindling Bucket
H: 18cm x 23cm



Traditional Wicker
H: 50cm x 35cm

# Stove Floor Plates





Semi circle front, 12mm glass, tempered glass floor plate available in smoke glass, and clear glass.

Small Standard, 12mm glass, 20mm slate effect, tempered glass floor plate available in smoke glass, clear glass & slate effect.







Teardrop, 12mm glass, 20 slate effect, tempered glass floor plate available in smoke glass, clear glass & slate effect.

|                      | Semi<br>Circle | Standard<br>Medium | Standard<br>Large | Truncated  | Teardrop                    | Square    | Inset      |
|----------------------|----------------|--------------------|-------------------|------------|-----------------------------|-----------|------------|
|                      | 900 x 900      | 800 x 850          | 850 x 1100        | 930 x 1000 | 1000 x 1000                 | 900 x 900 | 1000 x 300 |
| Glass smoked<br>12mm | •              | •                  | •                 | •          | •                           | •         | •          |
| Glass Clear<br>12mm  | •              | •                  | •                 | •          | •                           | •         | •          |
| Slate Effect<br>20mm | ×              | •                  | •                 | ×          | 1100 x 1100<br>slate effect | ×         | ×          |
| Steel<br>2mm         | ×              | ×                  | •                 | ×          | 1100 x 1100<br>steel        | ×         | ×          |

# Specifications

|        | Stove                  | Model         | Distance to combustibles (mm) | Distance<br>from rear<br>to centre of<br>top outlet<br>(mm) | Height to<br>centre of<br>rear outlet<br>(mm) | Outlet<br>diameter<br>(mm) | Dimen-<br>sions<br>HxWxD<br>(mm) | Weight             | Output<br>to<br>water | Total<br>Output<br>Wood = w<br>Smokeless<br>Fuels = c | Efficiency Wood = W Smokeless Fuels = C | CO @13%<br>O2 wood /<br>Coal | Energy<br>Rating | Particluates<br>mg/mo³@13% |     |
|--------|------------------------|---------------|-------------------------------|---|---|----------------------------|----------------------------------|--------------------|-----------------------|---|---|------------------------------|------------------|----------------------------|-----|
| SiA    | Ashcott                | STD           | Rear: 150                     | 128   | 455   | 125                        | 575 x 424<br>x 370               | 70kg               | N/A                   | W 4.7kW   | W 80.3%                                 | W 0.09                       | A+               | 31                         |     |
| ines). | 71311000               | PED /<br>LS   | Sides: 400                    | 120   | 615   | 123                        | 800 x 424<br>x 370               | 90kg               | IV/A                  | VV T./KVV   | W 6U.3 /6                               | W 0.09                       | A+               | 31                         |     |
| SiA    | Ashcott                | STD           | Sides: 300<br>Rear: 50        | 124   | 460   | 125                        | 597 x 619<br>x 304               | 120kg              | N/A                   | W4.7kW  | W 75%                                   | W 0.04                       | А                | W 31                       |     |
| (mall) | Wide                   | LS            | Rear: 50                      |   | 735   |                            | 850 x 619<br>x 304               | 120kg              |                       | VV4.7KVV  | , 6,5                                   | W 0.04                       |                  |                            |     |
|        |                        | STD           | Rear: 100<br>Sides: 250       |   | 514   | 125                        | 615 x 570                        | . 110kg            |                       |   |   | W 0.06<br>C 0.17             |                  |                            |     |
| SiA    | The<br>Woodland        | CONV          | Rear: 100<br>Sides: 100       | 130   |   |                            | x 340                            |                    | N/A                   | W 5.0kW   | W 81%<br>C 70.7%                        |                              | A+               | 23<br>22                   |     |
| ined). | Woodiana               | LS            | Rear: 100<br>Sides: 250       |   | 674   |                            | 775 x 570<br>x 340               |                    |                       |   | C 70.7%                                 |                              |                  |                            |     |
|        |                        | LS<br>CONV    | Rear: 100<br>Sides: 100       |   |   |                            |                                  |                    |                       |   |   |                              |                  |                            |     |
| cia    | Woodland               | STD           | Rear: 100                     | 150   | 560   | 150                        | 665 x 570<br>x 425               | 120kg              | N/A                   | W&C   | W 79.3%                                 | W 0.09                       | A                | W 12                       |     |
| SiA    | Large                  | LS            | Sides: 150                    |   | 720   |                            | 870 x 570<br>x 425               | 124kg              | IVA                   | 7.5kW   | C 80.7%                                 | C 0.11                       | ζ.               | C 19                       |     |
|        | Somerton<br>Side Glass | SIDE<br>GLASS | Rear: 100<br>Sides: 500       | 135   | 985   | 150                        | 1100 x 495<br>x 460              | 138kg              | N/A                   | W 7.0kW   | W 75.3%                                 | W 0.10                       | А                |                            |     |
|        | Ashcott                |               |                               | Rear: 300<br>Sides: 300                                     | 124   | 461                        |                                  | 580 x 424<br>x 370 | 60kg                  |   |   |                              |                  | A+                         |     |
|        |                        |               |                               |   |   | 124                        | 683                              | 100/150            | 800 x 424<br>x 370    | 80kg  | N/A                                     | 1.5 - 6.5kW                  | 83%              | N/A                        | AT. |

# Inset Specifications

|   | Stove                  | Model  | Distance to<br>Combustibles<br>(mm) | Building in<br>Dimensions<br>H x W x D<br>(mm)        | Distance<br>from rear to<br>centre of top<br>outlet<br>(mm) | Outlet<br>Diameter<br>(mm) | Inset Box<br>Dimensions<br>HxWxD<br>(mm) | Weight | Total<br>Output       | Efficiency Wood = W Smokeless Fules = B | CO @<br>13% O2<br>Wood /<br>Coal | Energy | Particluates<br>mg/mo³@13% |
|---|------------------------|--|-------------------------------------|---|---|----------------------------|--|--------|-----------------------|---|----------------------------------|--------|----------------------------|
|   | Burcott<br>Inset stove | Convection inset                               | Above: 300<br>Sides: 75             | Front:<br>510 x 390 x 280<br>Back:<br>420 x 285 x 280 | N/A   | 125                        | 600 x 477<br>x 355                       | 60kg   | 4.4kW                 | W 80%<br>C 75%                          | W 0.38<br>C 0.36                 | A+     |                            |
|   | Christon<br>400        | Convection inset                               | Rear: 200<br>Sides: 200             | 560 x 400<br>x 350                                    | -   | 125                        | 554 x 392<br>x 345                       | 75kg   | W<br>4.3kW<br>C 3.7kW | W 76%<br>C 76.2%                        | W 0.09<br>C 0.17                 | А      | 31                         |
| 1 | Christon<br>550        | Convection<br>inset /<br>Freestanding<br>Stove | Rear: 200<br>Sides: 200             | 570 x 570<br>x 380                                    | 105   | 125                        | 550 x 550<br>x 360                       | 90kg   | 4.8kW                 | W 77.8%                                 | W 0.09                           | А      | 30                         |
|   | Christon<br>750        | Convection<br>inset /<br>Freestanding<br>Stove | Rear: 100<br>Sides: 100             | 570 x 770<br>x 380                                    | 105   | 150                        | 550 (FS) x<br>800 (LS) x<br>750 x 360    | 110kg  | 8.7kW                 | W 78.4%                                 | W 0.09                           | А      | 32                         |

SIA

# Specifications

|       | Stove                 | Model      | Distance to<br>combustibles<br>(mm) | Distance<br>from rear<br>to centre of<br>top outlet<br>(mm) | Height to<br>centre of<br>rear outlet<br>(mm) | Outlet<br>Diameter<br>(mm) | Dimensions<br>HxWxD (mm)            | Weight | Total<br>Output<br>Wood = w<br>Smokeless<br>Fuels = c | Efficiency  Wood = W Smokeless Fuels = C | CO @13%<br>O2 wood /<br>Coal | Energy<br>Rating | Particluates<br>mg/mo³@13% |
|-------|-----------------------|------------|-------------------------------------|---|---|----------------------------|-------------------------------------|--------|---|--|------------------------------|------------------|----------------------------|
| SiA   | Loxton                | STD        | Rear: 100<br>Sides: 600             | 125   | 400   | 105                        | 525 x 380                           | 60kg   | W&C   | W 81.4%                                  | W 0.06                       |                  | 25                         |
| resk) |                       | CONV       | Rear: 100<br>Sides: 200             | 135   | 400   | 125                        | x 320                               | 63kg   | 4kW   | C 80.9%                                  | C 0.05                       | A+               | 14                         |
| SiA   | Loxton                | STD        | Rear: 100<br>Sides: 300             | 130   | 514   | 125                        | 606 x 510<br>x 320                  | 71kg   | W&C<br>5kW  | W 81%                                    | W 0.06                       |                  | 23                         |
| reed) |                       | LS         | Rear: 100<br>Sides: 300             | 130   | 660   | 125                        | 760 x 574<br>x 320                  | 82kg   | W&C<br>5kW  | C 70.1%                                  | C 0.17                       | A+               | 22                         |
| SiA   | Loxton                | STD        | Rear: 100                           |   | 564   |                            | 665 x 510<br>x 410                  | 91kg   | W&C   | W 79.3%                                  | W 0.09                       |                  | 12                         |
| ined) |                       | LS         | Sides: 600                          | 142   | 764   | 150                        | 865 x 510 x<br>410                  | 105kg  | 7.5kW   | C 70.7%                                  | C 0.11                       | А                | 16                         |
| SiA   | Loxton                | STD        | Rear: 100                           |   | 551   |                            | 665 x 710<br>x 410                  | 110kg  | W&C   | W 81%                                    | W 0.09                       | A+               | 10<br>16                   |
| rest) | 10                    | LS         | Rear: 100<br>Sides: 500             | 142   | 764   | 150                        | 865 x 710 x<br>410                  | 125kg  | 9.5kW   | C 71.7%                                  | C 0.25                       |                  |                            |
|       |                       | STD        | Rear: 100<br>Sides: 300             |   |   |                            | 606 x 510<br>x 380                  | 71kg   |   |  |                              |                  |                            |
| SIA   | Churchill<br>5        | CONV       | Rear: 100                           | 130   | 514   | 125                        | 606 x 575<br>x 380                  | 82kg   | W&C<br>5kW  | W 81%<br>C 70.1%                         | W 0.06<br>C 0.17             | A+               | 23<br>22                   |
|       |                       | LS<br>CONV | Sides: 150                          |   | 715   |                            | 800 x 575<br>x 380                  | 87kg   |   |  |                              |                  |                            |
|       |                       | STD        | Rear: 100<br>Sides: 600             |   | ECA.  |                            | 665 x 510<br>x 460                  | 91kg   |   |  | W 0.09<br>C 0.11             | А                |                            |
| SIA   | Churchill<br>8        | CONV       | Rear: 100<br>Sides: 150             | 142   | 564   | 150                        | 665 x 583<br>x 473                  | 98kg   | W&C<br>7.5kW  | W 79.3%<br>C 70.7%                       |                              |                  | 12<br>16                   |
|       |                       | LS<br>CONV | Rear: 100<br>Sides: 150             |   | 764   |                            | 1011 x 583<br>x 473                 | 117kg  |   |  |                              |                  |                            |
|       |                       | STD        | Rear: 100<br>Sides: 500             |   | ECA   |                            | 665 x 710<br>x 480                  | 110kg  |   |  |                              |                  |                            |
| SIA   | Churchill<br>10       | CONV       | Rear: 100<br>Sides: 100             | 142   | 564   | 150                        | 665 x 759<br>x 480                  | 117kg  | W&C<br>9.5kW  | W 81.0%<br>C 71.7%                       | W 0.09<br>C 0.25             | A+               | 10<br>16                   |
|       |                       | LS<br>CONV | Rear: 100<br>Sides: 100             |   | 918   |                            | 1052 x 759v<br>x 480                | 122kg  |   |  |                              |                  |                            |
|       | Loxton /<br>Churchill | STD        | Side: 550                           | 260   | N/A   | 150                        | 660 x 510<br>x 520 (L)<br>x 650 (C) | 130kg  | W&C   | W 77.3%                                  | W 0.28                       | Δ                |                            |
|       | 8 DS                  | LS         | Jide: JUU                           | 200   | TV/A  | 150                        | 965 x 510<br>x 520 (L)<br>x 650 (C) | 140kg  | 8kW   | C 81.9%                                  | C 0.10                       | A                |                            |
| SiA   | Woodland              | STD        | Sides: 200                          | 215   | N/A   | 125                        | 620 x 570<br>x 430                  | 140kg  | W&C   |  | W 0.08                       | A                |                            |
| ined) | DS CAT                | LS         | Sides: 200                          | 210   | 19/73   | 120                        | 820 x 570<br>x 430                  | 150kg  | 8kW   | W 76%                                    | ,, 0.00                      | п                | 20                         |

Logstore = LS Convection = CONV





Mendip Stoves Ltd Unit H1 Mendip Industrial Estate Mendip Road Rooksbridge Somerset BS26 2UG



Tel: 01934 750 500 www.mendipstoves.co.uk info@mendipstoves.co.uk

Mendip stoves Ltd. Have a policy of continuous improvement and reserves the right to change specification without prior notice.



Mendip Stoves are part of the Eurostove group of companies.

Issue 14.1: Sept 2019

# 5 Year Extended Warranty



Mendip Stoves have an extended 5 Year Warranty when your stove is bought and installed by a registered retailer and installer (terms and conditions apply). The extended Warranty covers the steel body & door castings but does not cover damage caused by faulty operation such as overheating of the stove. The Guarantee does not cover replacement consumable parts such as glass, grates, ropes seals or firebricks. Stoves purchased from a non-registered retailer are covered by a 12 month warranty.

Mendip Stoves are proud to sponsor the Woodland Trust.

For full information please consult our website.



The Woodland Trust, Kempton Way, Grantham, Lincolnshire NG31 6LL The Woodland Trust is a charity registered in England and Wales no. 294344 and in Scotland no. SC038885. A non-profit making company limited by guarantee. Registered in England no. 1982873. The Woodland Trust logo is a registered trademark.